INSTALLATION & CONNECTIONS

IMPORTANT:

- Use qualified electrician for proper assembly and installation!
- Please read all instructions prior to installation.
- Installation of this fixture must comply with local building codes.

ASSEMBLY INSTRUCTION

- 1. Carefully un-pack the fixture. Make sure all the parts are all take out from the carton.
- 2. Spread the arms apart so that they are evenly spaced. If an arm becomes loose, tighten the 1/8 hex nut.
- 3. Turn the nipple into the hickey using caution not to go too far into the hickey and cut through the wires. Use the 1/8 hex nut to tighten the nipple to the hickey.
- 4. Put the body over the nipple, making sure all wires are inside the body, and secure it with 1/8 hex nut. Then put the decorative spring over the body and tighten with the decorative ball nut.
- 5. Put the lead wire through the center pipe, and tighten the center pipe to the fixture.
- 6.Install the decorative leaves by making sure that the bottom of each leaf goes through the rectangle holders near the bottom of the fixture. (see fig 2.)


MOUNTING INSTRUCTIONS

- 1. Turn off power at main fuse box.
- 2.Mount crossbar (A) to junction box with 2 screws supplied.(See Fig.1) Make sure black and white wires of junction box run through the middle opening of the crossbar.
- 3. Fasten ground wire to ground screw of junction box.
- 4. Connect black and white wires of power supply to black and white wires of the pendant.
 - NOTE: All wire connections should be made with wire nuts or marettes (included) and pushed back into junction box.
- 5. Mount back plate or canopy (B) over the 2 screws of crossbar (A). Secure with 2 decorative knobs or caps(C).

BULB AND GLASS INSTALLATION

- 1.Un-screw the Socket Ring from socket. Slip glass over socket and secure with Socket Ring by using **TOOL** provided.
- 2.Install Type B Bulb 40 Watts Recommended 60 Watts Max. **Bulb not included.**

ITEM NUMBER: #32303 INSTRUCTIONS

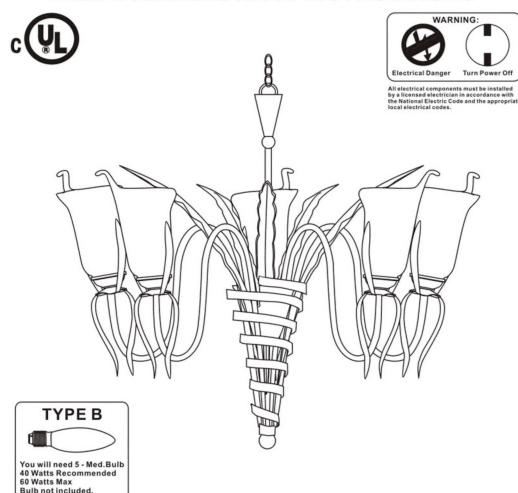







MODEL#:32303 ASSEMBLY AND INSTRUCTIONS

